

EQ-SERIES PUMPS




- Designed in every detail for maximum efficiency
- The only non-corrosive, all plastic pump designed exclusively for the commercial pool and water applications market
- The EQ's impeller features an exclusive design that provides true breakthrough performance
- Lower load due to efficient impeller design means longer motor life
- Cam and Ramp™ lid design with clear lid for added convenience in servicing

Additional Features:

- Lightweight
- 6" suction and 4" discharge with strainer pot
- Heat resistant seal operates at up to 150° Fahrenheit
- Cam and Ramp™ lid design with clear lid
- Self-priming pump (with strainer pot)
- NSF-Listed
- Available in single and three phase 60 hertz models
- Models available for water feature applications
- One-year limited warranty

Available with or without strainer.
Pricing upon request.


EQ Series performance curve

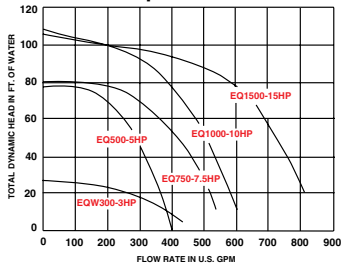


C-SERIES PUMPS



PUMP PERFORMANCE CURVE CH/CHK SERIES PUMP

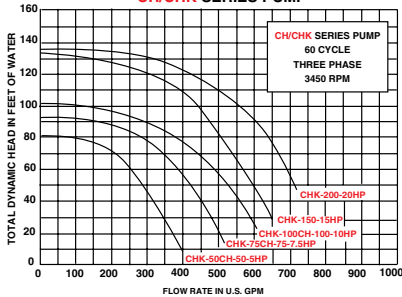

PUMP PERFORMANCE CURVE CM/CMK SERIES PUMP

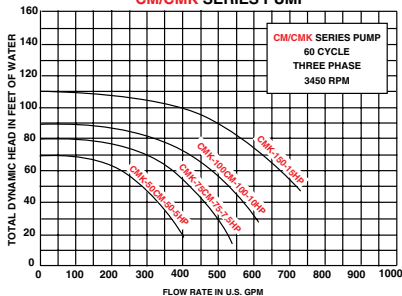

Perfect for the toughest outdoor and indoor projects, the C-Series pump gets its durability from all-brass construction and a stainless steel basket. For decades, the C-Series has proven its dependability as one of the most effective commercial pumps available anywhere. It has set the standard for medium and high-head performance in the pool industry. The C-Series Pump is available with and without a hair and lint pot.

Standard Features:

- Heavy-Gauge stainless steel strainer basket
 - 6" suction and 4" discharge for maximum efficiency
 - Open area of Strainer Basket is 5 times area of suction port
 - Heat-resistant seal operates at up to 150° Fahrenheit
 - One year limited warranty
 - 200-208 and 575 volt models available on request
- Available with or without strainer.
Pumps are self-priming with strainer.
Pricing upon request.

WHISPERFLO® HIGH PERFORMANCE PUMPS

Energy efficient swimming pool pumps. 40% glass-filled thermo-plastic with the Cam& Ramp™ "see thru" lid design. Self priming, high flow with patented Funnel-Flo™ diffusers. 2 in. suction and discharge ports. Motor features threaded shaft and durable commercial duty 56 frame motor with NEMA square flange.



HIGH PERFORMANCE FULL-RATED ENERGY EFFICIENT

Product No.	Model No.	Voltage	Full Load Amps	HP	SF	Approx. Ship. Wt. (lbs.)	Price
01-1511	WFE-2	115/208-230V	11.2/6.0/5.6	1/2	1.9	41	\$666.00
01-1512	WFE-3	115/208-230V	11.2/6.0/5.6	3/4	1.67	41	\$717.00
01-1513	WFE-4	115/208-230V	14.8/7.8/7.4	1	1.65	46	\$775.00
01-1514	WFE-6	208-230V	9.6/8.8	1-1/2	1.47	54	\$852.00
01-1515	WFE-8	208-230V	11.0/10.2	2	1.30	55	\$1,001.00
01-1516	WFE-12	230V	15.0/13.6	3	1.15	56	\$1,225.00

3-PHASE HIGH PERFORMANCE

Product No.	Model No.	Voltage	Full Load Amps	HP	SF	Approx. Ship. Wt. (lbs.)	Price
01-1021	WFK-3	208/230/460V	3.8/3.6/1.8	3/4	1.65	42	\$747.00
01-1568	WFK-4	208/230/460V	5.0/4.6/2.3	1	1.65	46	\$798.00
01-1569	WFK-6	208/230/460V	6.4/5.8/2.9	1-1/2	1.47	54	\$877.00
01-1570	WFK-8	208/230/460V	7.1/6.8/3.4	2	1.30	56	\$1,031.00
01-1571	WFK-12	208/230/460V	11.0/10.4/5.2	3	1.15	58	\$1,261.00

INTELLIFLO® VF HIGH PERFORMANCE PUMP

Intelliflo® VF High Performance Pump is the first pump to deliver the exact amount of water needed to perform different tasks. It is adaptable to any pool, spa or water feature application.



Product No.	Model No.	Voltage	Full Load Amps	Approx. Ship. Wt. (lbs.)	Price
01-1012	Intelliflo® High Performance VF 3.2 KW Pump	230	16	47	\$2,217.00

VS-3050 Variable Speed Pump allows programming for four different speeds for different pool, spa or water applications. By dialing in the minimum speed required, the pump works less and uses less energy. Pump speeds are easily adjusted with an arrow button.

Product No.	Model No.	Voltage	Full Load Amps	Approx. Ship. Wt. (lbs.)	Price
01-1013	Intelliflo® VS-3050 Pump	230	16	47	\$1,560.00

DYNAMO PUMPS

PENTAIR PUMPS



PACFAB DYNAMO PUMPS(Above Ground)

Fiberglass and reinforced pump with closed impeller, large 5" strainer pot, see-thru lid for easier cleaning on strainer. One (1) year warranty on pump and motor. Comes with 3' cord.

Cat. No.	Pump Model	Voltage	Full Load S.F.	Full Load Amp	Wt.	Price
34-0194	¾ H.P.	115V	1.00	9.2	33 lbs.	\$290.00
34-0197	1 H.P.	115V	1.00	12.0	37 lbs.	\$302.00
34-0210	1½ H.P.	115	1.00	12.0	37 lbs.	\$309.00
34-0219	2 H.P.	115	1.00	16.0	42 lbs.	\$345.00

PENTAIR CHALLENGER



PENTAIR CHALLENGER

Top of the line performance. Pump components are custom molded in Noryl ETX for superior strength and durability. Designed to withstand 75 p.s.i. hydrostatic pressure. Suction and discharge ports are 2" to provide rapid self priming.

Cat. No.	Model No.	Nom. HP	Max. BHP	Volts	Max. Amps	Approx. Ship. S.F.	Approx. Ship. Wt. (lbs.)	Gpm @ 60' Head	Price
34-3232	CF11-N1-¾A	¾	.95	115/230	10.8/5.4	1.27	37	40	\$630.00
34-3233	CF11-N1-1A	1	1.25	115/230	14.2/7.1	1.25	39	52	\$689.00
34-3234	CF11-N1-1½A	1½	1.65	115/230	16.0/8.0	1.10	41	80	\$720.00
34-3240	CF11-N1-2A	2	2.20	230	11.2	1.10	49	92	\$788.00
34-5209	CH11-N1-3FE	3	3.45	208/230	15.0/13.6	1.15	55	130	\$1,236.00
34-5210	CF11-N1-5FE	5	5	230	19.4	1.0	70	195	\$2,266.00
34-5299	CH11-N1-3FE 3PH	3	3.45	208/230/460	12.0/10.4/5.2	1.15	55	130	\$1,259.00
34-5300	CF11-N1-5FE 3PH	5	5	230/460	13.4/6.7	1.0	70	195	\$2,102.00